

Select Vehicle | New TSBs | Technician's Reference

Component Search:  OK

Conversion Calculator

2000 Mercedes Benz Truck ML 55 AMG (163.174) V8-5.5L (113.981)


[Vehicle Level](#) → [Windows and Glass](#) → [Quarter Window Glass](#) → [Service and Repair](#) → [AR67.30-P-2301GI Remove/Install Side Window Between C and D Pillars](#) ←

## AR67.30-P-2301GI Remove/Install Side Window Between C and D Pillars

[Notes](#)

### AR67.30-P-2301GI Remove/Install Side Window Between C and D Pillars

- with CODE (848) Electric pivoting side window

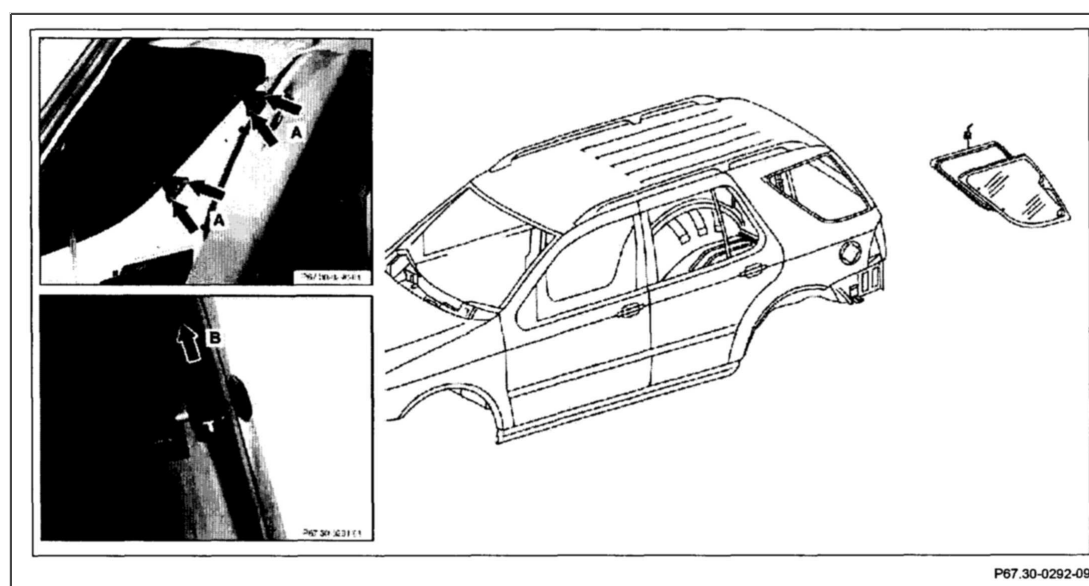

Zoom

Sized for Print

### Remove/Install

- 1 Remove paneling on C-pillar
- 2 Secure window against falling down.

**NOTE:** To avoid damage to window or paintwork

- 3 Unscrew bolts (A) at hinges
  - Screw for side window hinge to C pillar = **12 Nm**

4 Pull back cover at opening mechanism Pull back cover at opening mechanism

**NOTE:** For access to connecting point at opening mechanism.

5 Remove window

**NOTE:**

- **Caution: Do not damage window and paint if adhesive tape or support is removed**
- Extend window toward top (B).
- Check seal.
- If necessary, replace seal of side window.

6 Install in the reverse order