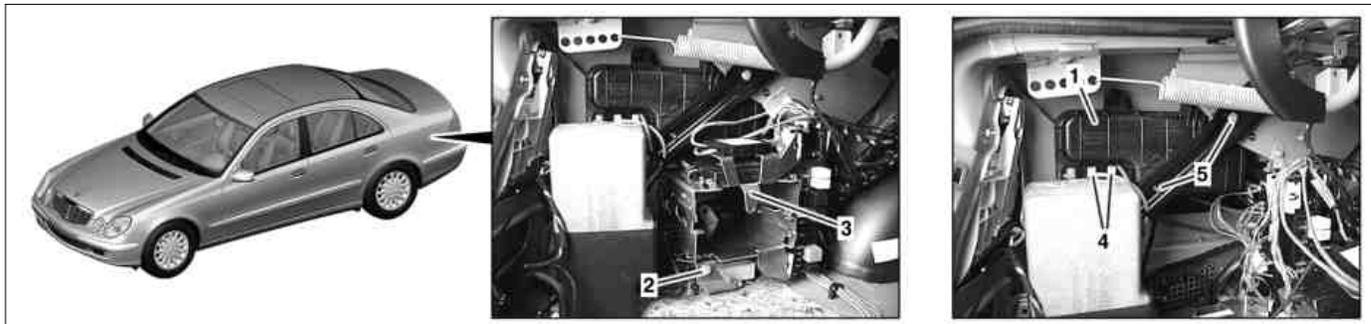


MODEL 211.0**with CODE (433) Left dynamic seat, incl. multicontour seat****with CODE (434) Right dynamic seat, incl. multicontour seat**

P91.25-2142-07

1 Overpressure reservoir**2** Screw*(with code (220a) Parktronic system (PTS)**or with code (527) COMAND APS (with navigation)**or with code (529) HIGH Class Japan**or with code (530) COMAND APS USA (with navigation)**or with code (860) TV tuner**or with code (889) Keyless Go***3** Bracket *(with code (220a) Parktronic system (PTS)**or with code (527) COMAND APS**(with navigation)**or with code (529) HIGH Class Japan**or with code (530) COMAND APS**USA (with navigation)**or with code (860) TV tuner**or with code (889) Keyless Go***4** Pneumatic lines**5** Bolts

	Remove/Install		
1	Remove left side paneling in trunk	On vehicles without code (287a) through-loading feature On vehicles with code (287a) Through-loading feature	AR68.30-P-4800T AR68.30-P-4800TA
2.1	Remove screw (2) and swivel bracket (3) forwards	Only for vehicles with code (220a) Parktronic system (PTS) (with code (220a) Parktronic system (PTS) or with code (527) COMAND APS (with navigation) or with code (529) HIGH Class Japan or with code (530) COMAND APS USA (with navigation) or with code (860) TV tuner or with code (889) Keyless Go	
3	Disconnect pneumatic lines (4) from overpressure reservoir (1)		
4	Remove screws (5) and remove overpressure reservoir (1) downwards		
5	Install in the reverse order		