


Shown on model 212

- 1 Lock
- 2 Clamping lever
- 3 Engine hood hinge

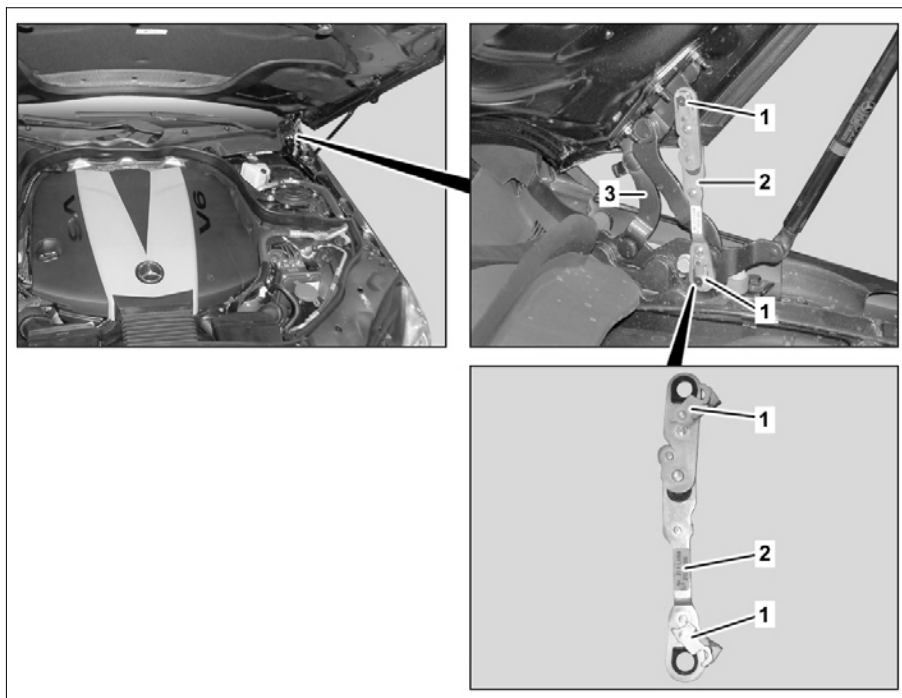

P91.60-3898-06

	Remove/install		
Danger!	Risk of injury caused by fingers being pinched or crushed when removing, installing or aligning hoods, doors, trunk lids, liftgates or sliding roof	Keep body parts and limbs well clear of moving parts.	AS00.00-Z-0011-01A
Danger!	Risk of injury caused by body parts being pinched or crushed when working on gas-filled struts under tension	Only remove and install gas-filled struts when they are not under tension and when the components are properly secured.	AS00.00-Z-0012-01A
1	Open lock (1) at clamping lever (2)		
2	Remove clamping lever (2) from engine hood hinge (3)		
3	Install in the reverse order		