


2.7.12

**Shown on MODEL 246**

- 1 Fender liner
- 2 Expansion clip

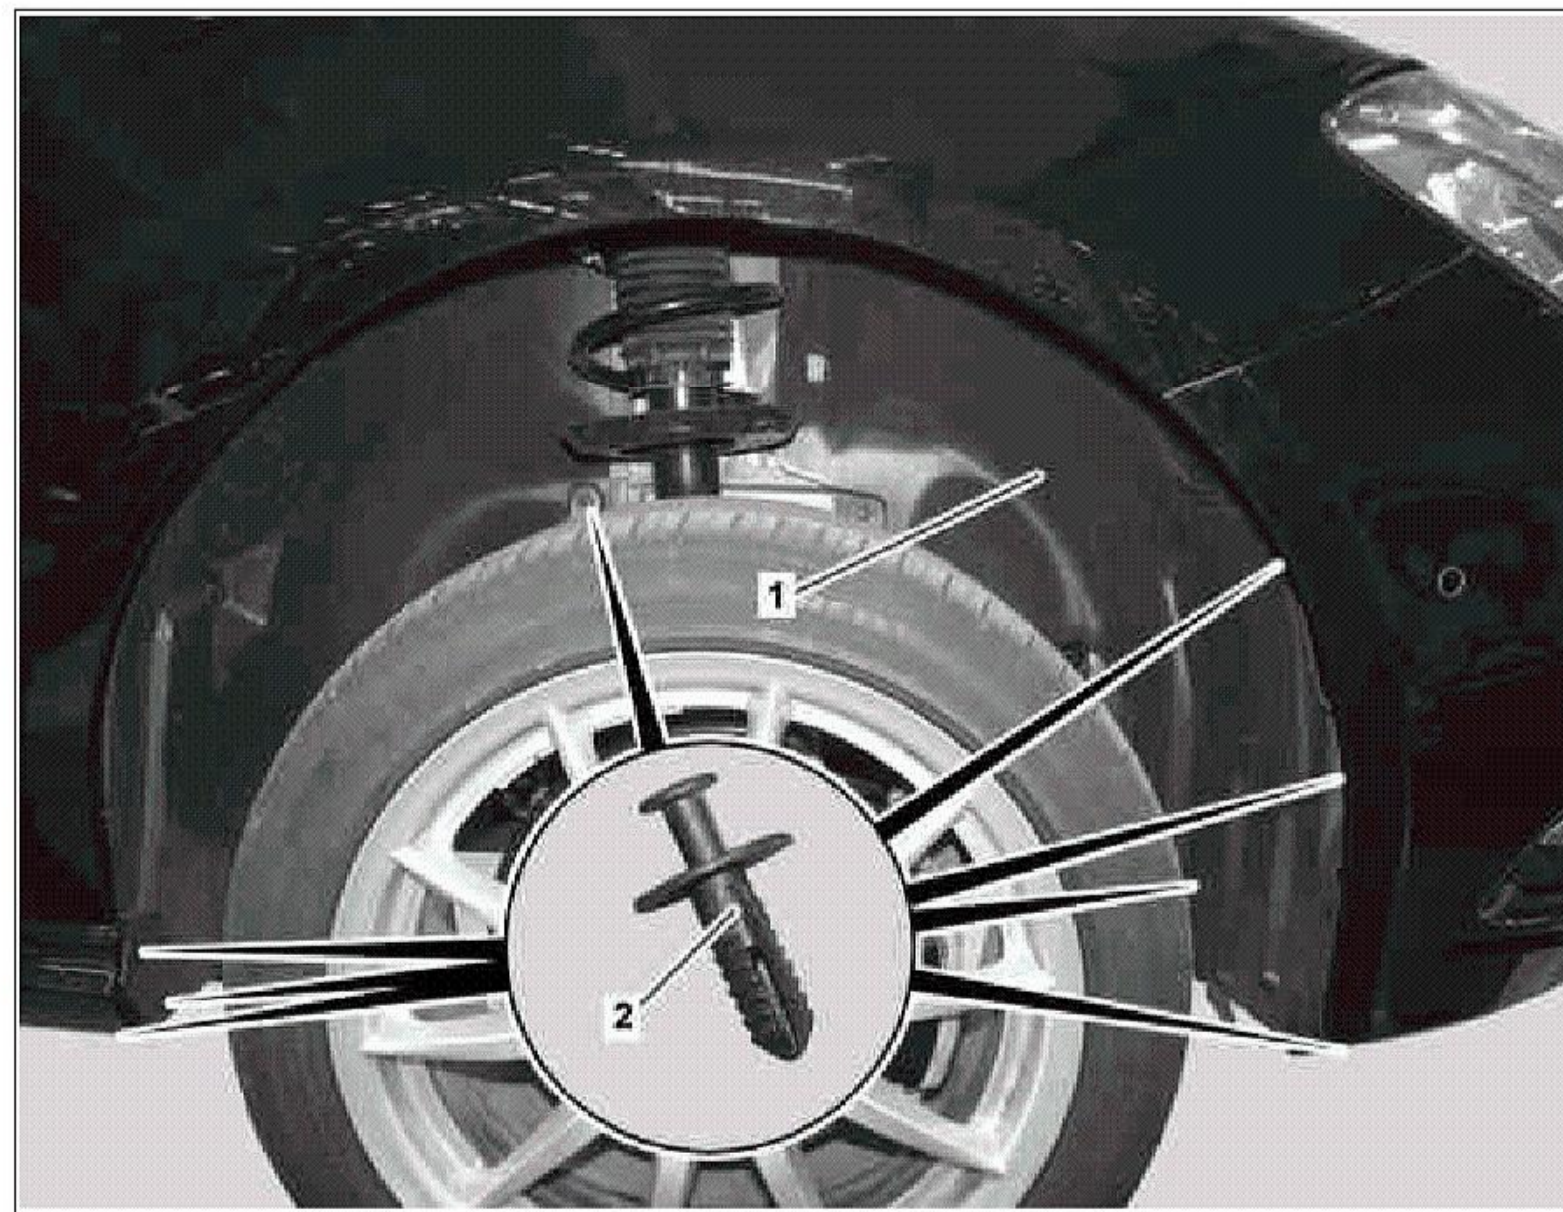


P88.10-2250-06




Shown on MODEL 246

- 1 Fender liner
- 3 Bolts

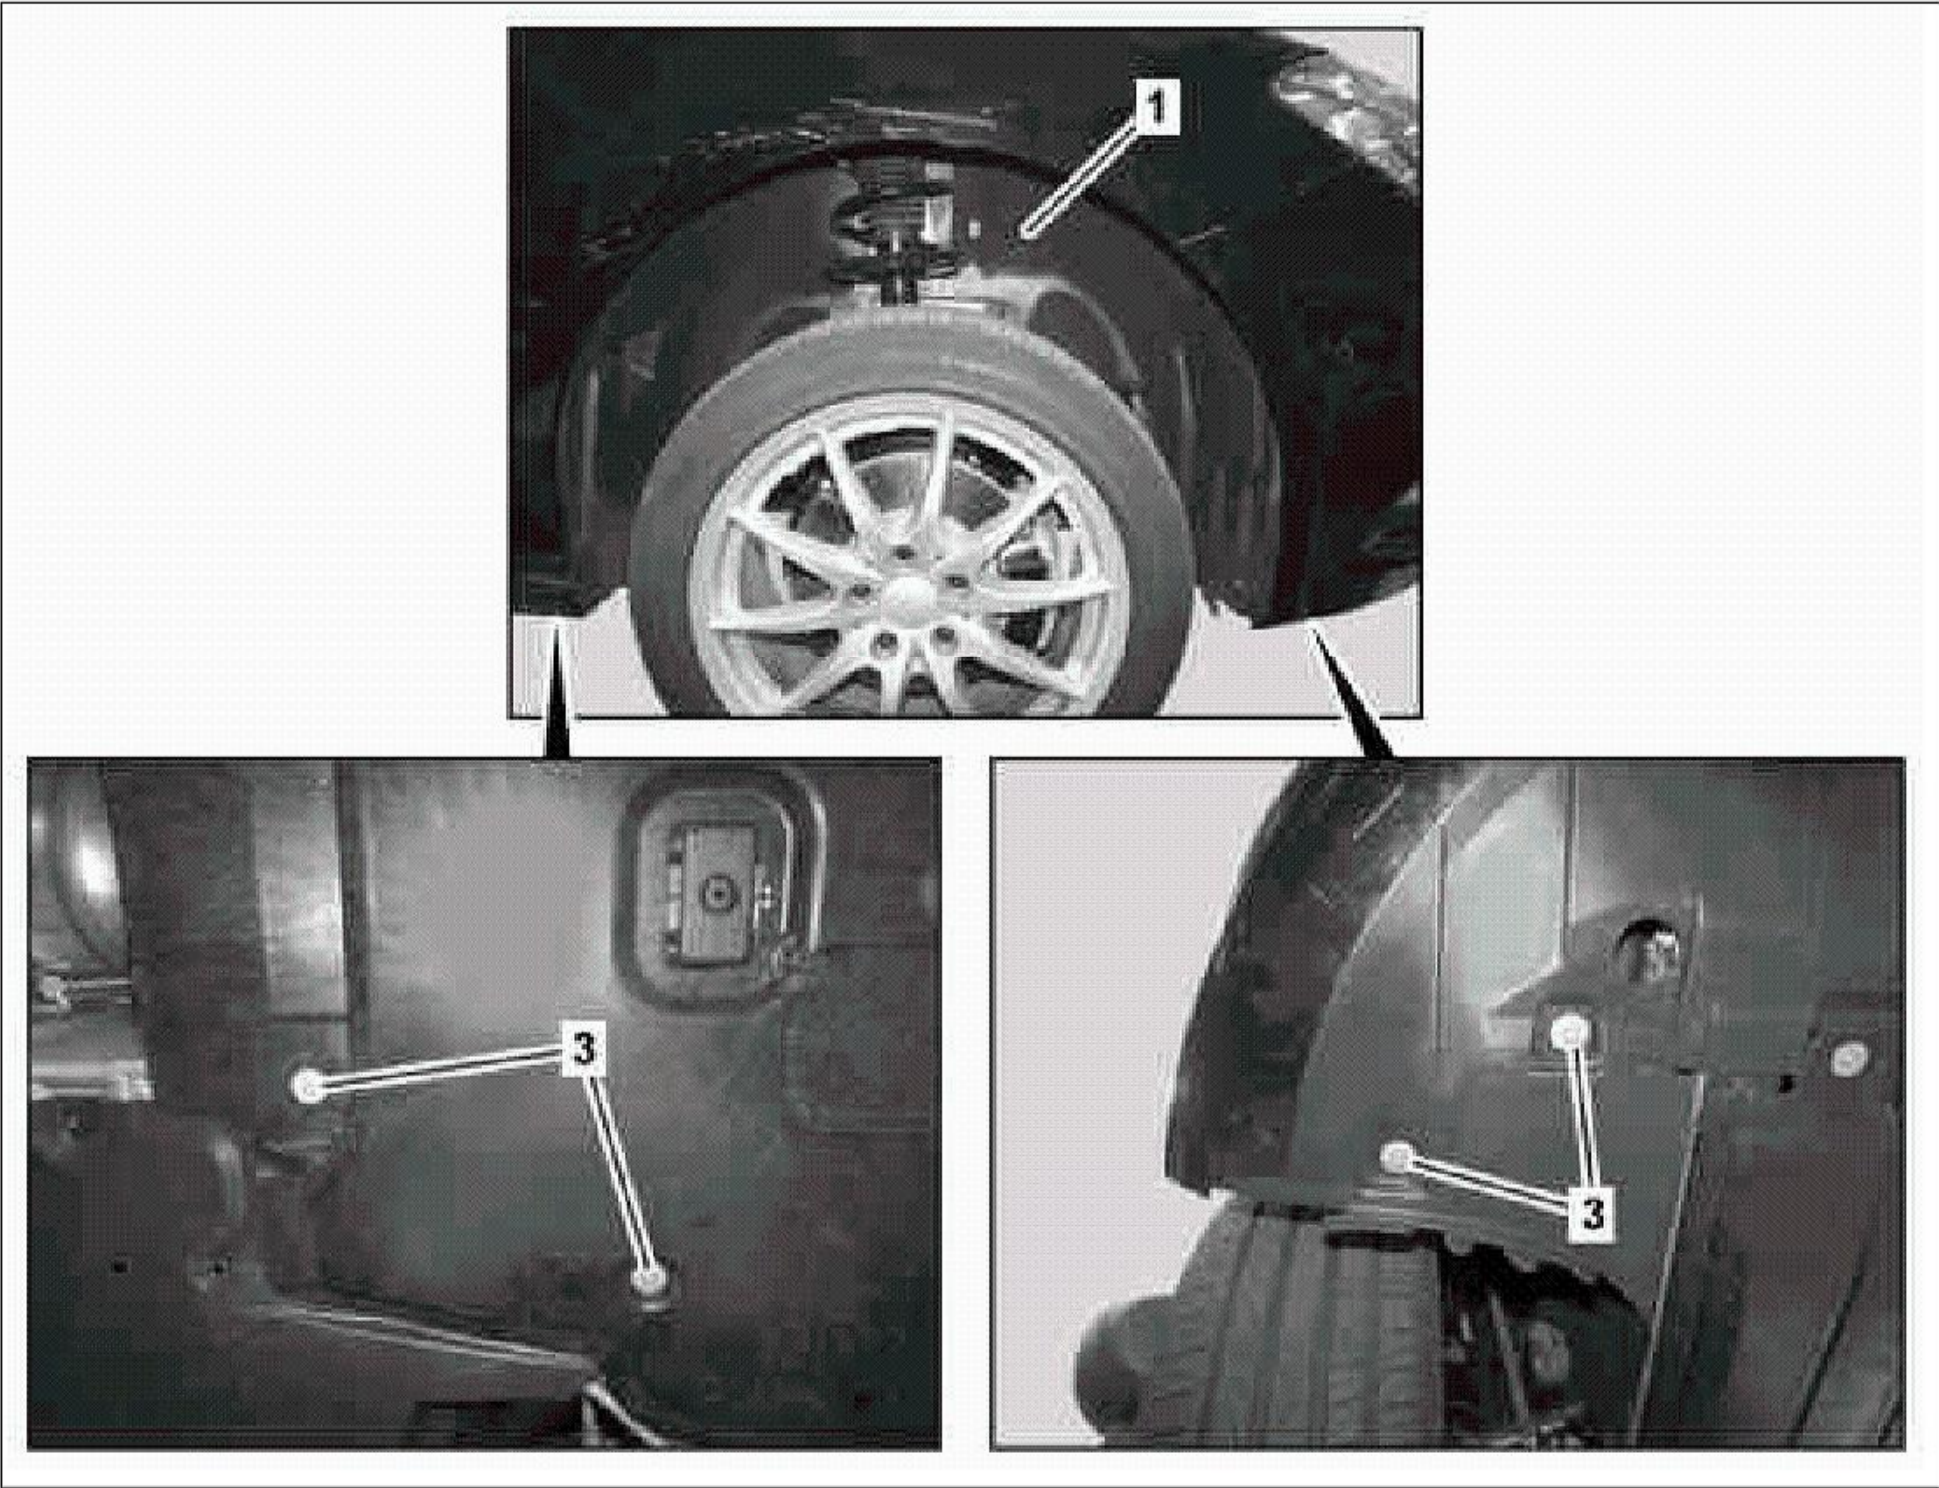

P88.10-2251-06



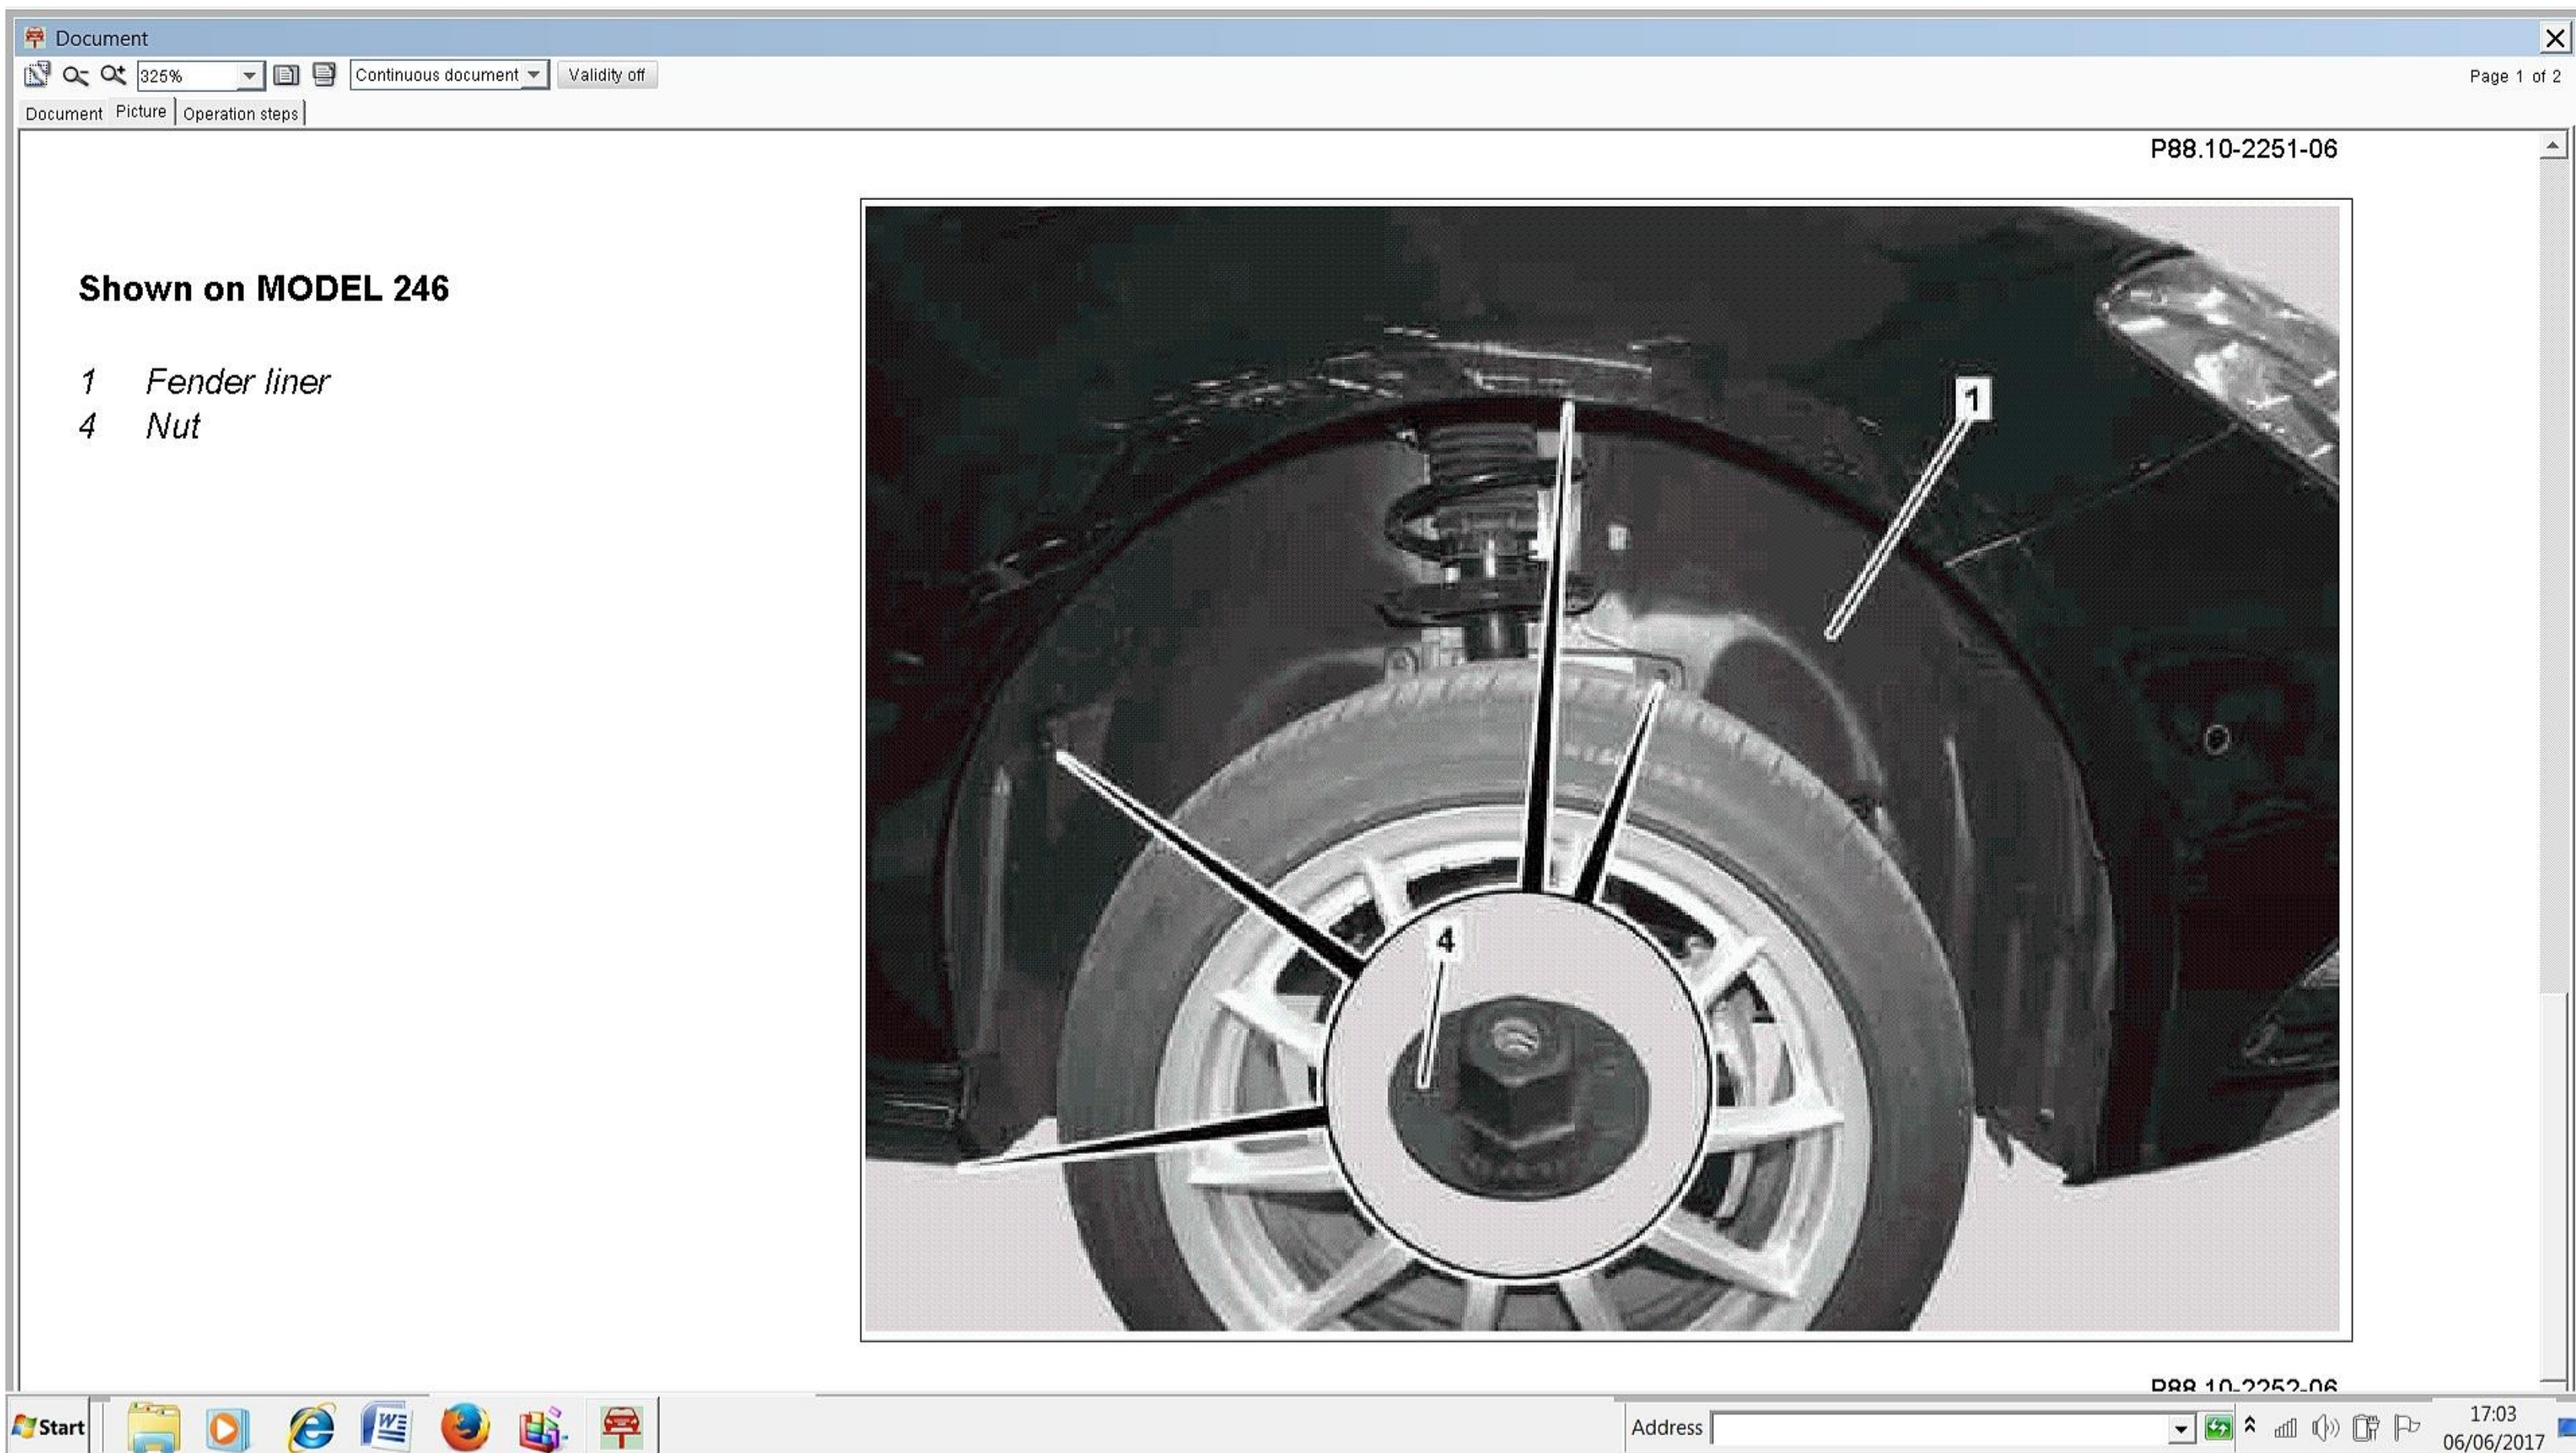



Document
325%
Continuous document
Validity off
Page 1 of 1

Document
Picture
Operation steps

<div> <div> <div></div> <div></div> </div> <div> <div></div> <div></div> </div> </div>	<b>Remove/install</b>		
<div> <div> <div></div> <div></div> </div> <div> <div></div> <div></div> </div> </div>	<b>Risk of death</b> caused by vehicle slipping or toppling off of the lifting platform.	Align vehicle between vehicle lift columns and position the four support plates at the vehicle lift support points specified by vehicle manufacturer.	<div> <div>AS00.00-Z-0010-01A</div> </div>
1	Raise vehicle with vehicle lift		AR00.60-P-1000AK
2	Remove expansion clips (2)		
3	Remove screws/bolts (3)		
4	Unscrew nuts (4)		
5	Pull outer edge of fender liner (1) toward inside out of fender edge and remove fender liner (1) downward		
6	Install in the reverse order		

Start

Address

17:07  
06/06/2017